
XKS-PWL

GARDEN PUMP



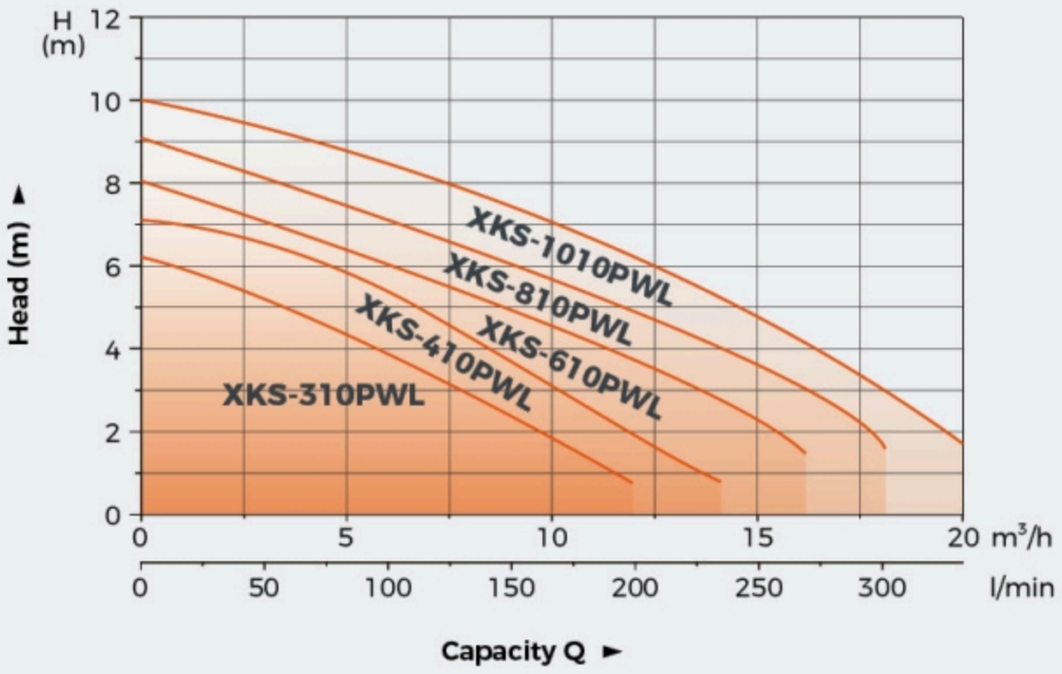

Features

Engineering plastic pump body

Float switch ensures automatic cut-in and cut-out

Built-in thermal protector

Application

Can be used for transfer dirty water or other liquids similar to water in physical and chemical properties

Suitable to be immersed in water for lifting water from well or the pool, and draining water from the basement

Model	XKS-310PWL	XKS-410PWL	XKS-610PWL	XKS-810PWL	XKS-1010PWL
Rated Power	300 W	400 W	550 W	750 W	1000 W
Max. Head	6 m	7 m	8 m	9 m	10 m
Max. Flow	12 m^3/h	14 m^3/h	16 m^3/h	18 m^3/h	20 m^3/h
Max. Suction Depth	7 m	7 m	7 m	7 m	7 m
Max. Dia of Particle	25 mm	25 mm	35 mm	35 mm	35 mm
Outlet	1 1/4"	1 1/4"	1 1/2"	1 1/2"	1 1/2"
Power Cable Type	H05RN~F	H05RN~F	H05RN~F	H05RN~F	H07RN~F
Length of Power Cable	10 m	10 m	10 m	10 m	10 m
Protection Class	IPX8	IPX8	IPX8	IPX8	IPX8
Max. Delivery Temperature	35 °C	35 °C	35 °C	35 °C	35 °C
Qty in carton box	4 pcs	4 pcs	4 pcs	4 pcs	4 pcs
Package Dimension	420x350x355 mm	420x350x355 mm	420x350x405 mm	420x350x405 mm	420x350x405 mm
Package Gross Weight	18.4 kg	20.0 kg	22.0 kg	23.2 kg	26.8 kg
Qty/20'GP	2144	2144	1904	1904	1904
Automatic function	Float Switch	Float Switch	Float Switch	Float Switch	Float Switch