
XKS-S

GARDEN SUBMERSIBLE PUMP



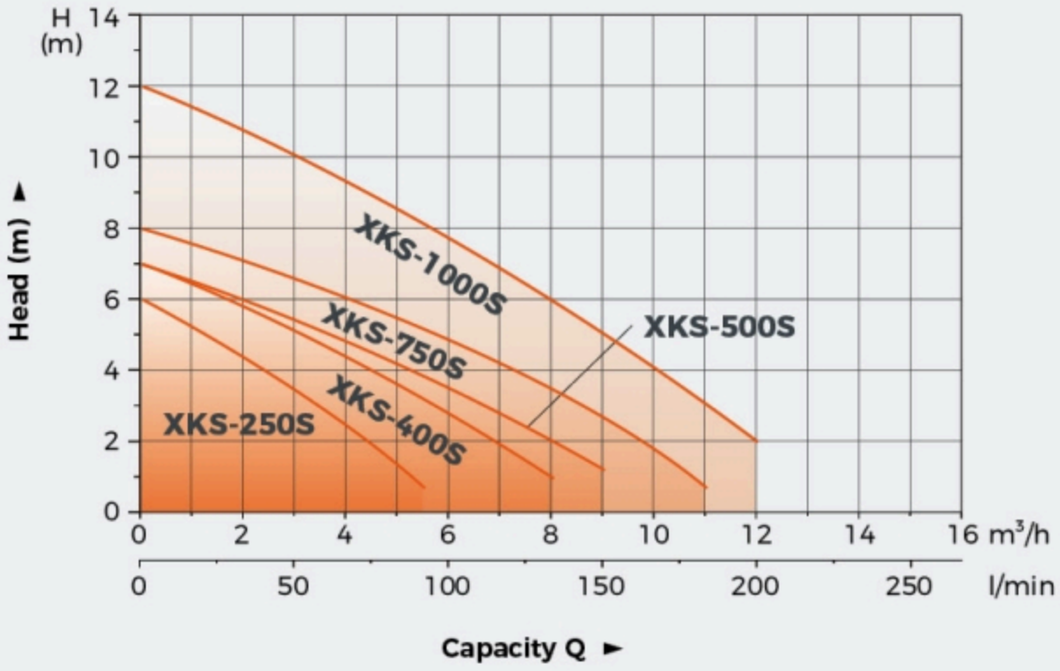

Features

Stainless steel pump housing
Can stay permanently submerged in water
Motor with thermal protector
Not allowed to transfer saline water, flammable liquids and foodstuff
Motor with thermal protector

Application

Can be used for transfer clean water or other liquids similar to water in physical and chemical properties

Suitable to be immersed in water for lifting water from well or the pool, and draining water from the basement

Model	XKS-250S	XKS-400S	XKS-500S	XKS-750S	XKS-1000S
Rated Power	250 W	400 W	500 W	750 W	1000 W
Max. Head	6 m	7 m	7 m	8 m	12 m
Max. Flow	5.5 m^3/h	8 m^3/h	9 m^3/h	11 m^3/h	12 m^3/h
Max. Depth of immersion	7 m	7 m	7 m	7 m	7 m
Max. Dia of Particle	5 mm	5 mm	5 mm	5 mm	5 mm
Outlet	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"
Power Cable Type	H05RN-F	H05RN-F	H05RN-F	H05RN-F	H07RN-F
Length of Power Cable	10 m	10 m	10 m	10 m	10 m
Protection Class	IPX8	IPX8	IPX8	IPX8	IPX8
Max. liquid Temperature	35 °C	35 °C	35 °C	35 °C	35 °C
Qty in carton box	4 pcs	4 pcs	4 pcs	4 pcs	4 pcs
Package Dimension	420x320x320 mm	420×320×320 mm	420×320×320 mm	420×320×320 mm	430×330×365 mm
Package Gross Weight	18.56 kg	19.56 kg	21.96 kg	23.24 kg	28 kg
Qty/20'GP	2552	2552	2552	2552	2064
Automatic function	Float Switch	Float Switch	Float Switch	Float Switch	Float Switch